



The Right Connection®

# Fueler 100™ Plus

Heavy-duty high-flow automatic diesel nozzle

### Applications:

- Designed for high-volume fuel transfer
- Typical uses include high-volume truck fleet and bus terminals, fuel oil delivery, and industrial operations

### Features:

- Higher flow rate than standard fueling nozzles
- High-strength aluminum body casting for great durability
- Roto-matic latch pin for smooth auto shut-off
- PTFE stem packing eliminates leaks
- Dual poppets for easy high-pressure operation
- Grooved spout holds nozzle in the tank
- Hand guard is integrated with the body
- Nylon spout lock nut does not gall, making it easy to change the spout


### Materials:

- Body: high-strength aluminum
- Body cap: high-strength cast aluminum
- Spout: aluminum
- Lever: high-strength cast aluminum
- Vacuum cap: zinc
- Main stem: stainless steel
- Seals: FKM/Nitrile<sup>1</sup>
- Packing: PTFE

### Specifications:

- Inlet: 1¼" or 1½" NPT or BSPP
- Spout: 1⅜"
- Weight: 6.9 lbs.
- Length: 13.5"
- Maximum working pressure: **100 PSI, 90 GPM**

<sup>1</sup> Cold climate seals are available.

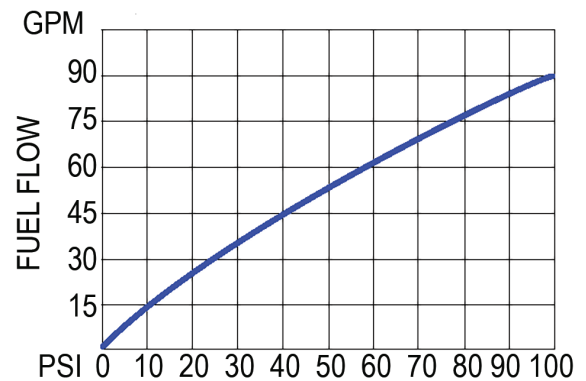

For use with gasoline up to 25% ethanol blend and diesel / biodiesel up to 20% (B20)

Description	Part #
1¼" NPT inlet Hi-Flow PLUS fuel nozzle with 1⅜" spout	<b>DNOG5PL</b>
1½" NPT inlet Hi-Flow PLUS fuel nozzle with 1⅜" spout	<b>DNOG6PL</b>

connect with us on



### Dixon Bayco

800 High Street • Chestertown, MD 21620

ph: 410.778.2000 • fx: 410.778.4702

[dixonvalve.com](http://dixonvalve.com)