



Table of Contents

Cam & groove display ..... 3 - 5

Fire hydrant accessories display ..... 6 - 11

Gauges display ..... 12

Pressure washer display ..... 13 - 17

Garden hose display ..... 18 - 23

Pneumatic display ..... 24 - 30

Hydraulic display ..... 31 - 36

Outside air display ..... 37 - 44

Maintenance & repair ..... 45 - 48

End cap display hardware ..... 49



Pg. 3



Pg. 7



Pg. 13




Pg. 14




Pg. 19



Pg. 25

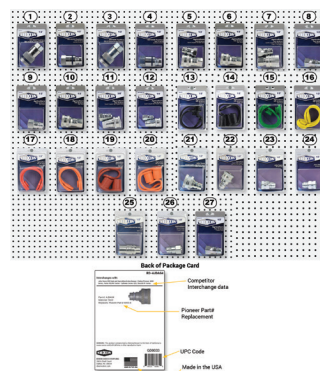

Pg. 32

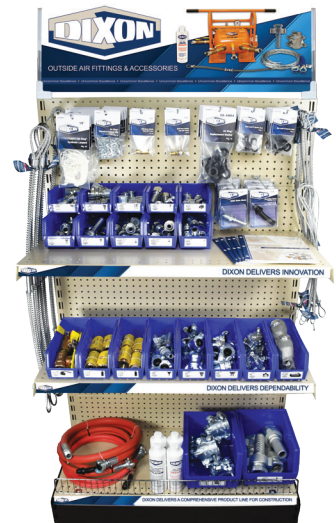

Pg. 38

## Cam & Groove Display



**New**

**PART #: DSP-RETAILKIT**

**Features**

- Blue retail bins
- Bin labels
- Retail display signage

**NOTE:** The components of the display can be customized to match the unique needs of your business. Shelving purchased separately, see pg. 49

"Great point-of-sale tool for our 'will call' area."  
-Tripp, Texas



**Type A Adapter x Female NPT**

| Part #   | Required Piece Qty | Description                      |
|----------|--------------------|----------------------------------|
| 200-A-AL | 10                 | 2" aluminum adapter x female NPT |



**Type B Coupler x Male NPT**

| Part #   | Required Piece Qty | Description                    |
|----------|--------------------|--------------------------------|
| 200-B-AL | 10                 | 2" aluminum coupler x male NPT |



**Type C Coupler x Hose Shank**

| Part #   | Required Piece Qty | Description                      |
|----------|--------------------|----------------------------------|
| 200-C-AL | 10                 | 2" aluminum coupler x hose shank |



**Type D Coupler x Female NPT**

| Part #   | Required Piece Qty | Description                      |
|----------|--------------------|----------------------------------|
| 200-D-AL | 10                 | 2" aluminum coupler x female NPT |



**Type E Adapter x Hose Shank**

| Part #   | Required Piece Qty | Description                      |
|----------|--------------------|----------------------------------|
| 200-E-AL | 10                 | 2" aluminum adapter x hose shank |



**Type F Adapter x Male NPT**

| Part #   | Required Piece Qty | Description                    |
|----------|--------------------|--------------------------------|
| 200-F-AL | 10                 | 2" aluminum adapter x male NPT |



**Type DP Dust Plug**

| Part #    | Required Piece Qty | Description           |
|-----------|--------------------|-----------------------|
| 200-DP-AL | 10                 | 2" aluminum dust plug |



**Type DC Dust Cap**

| Part #    | Required Piece Qty | Description          |
|-----------|--------------------|----------------------|
| 200-DC-AL | 10                 | 2" aluminum dust cap |

### Synthetic Single Jacket Mill Hose



| Part #    | Required Piece Qty | Description                        |
|-----------|--------------------|------------------------------------|
| M20-50GAX | 2                  | 2" x 50' - single jacket mill hose |

### Synthetic Single Jacket Mill Hose



| Part #    | Required Piece Qty | Description                        |
|-----------|--------------------|------------------------------------|
| M20-25GAX | 2                  | 2" x 25' - single jacket mill hose |

### Cam and Groove End Cap Sign



| Part #   | Required Piece Qty | Description                 |
|----------|--------------------|-----------------------------|
| DSP-SIGN | 1                  | cam and groove end cap sign |

### End Cap Sign Holder




| Part #     | Required Piece Qty | Description         |
|------------|--------------------|---------------------|
| SIGNHOLDER | 2                  | end cap sign holder |

### Blue Bins with Label



| Part #      | Required Piece Qty | Description                        |
|-------------|--------------------|------------------------------------|
| CG-BLU-BINS | 1                  | blue bins with label/poster holder |

### Basic 8 Cam & Groove Poster



| Part #     | Required Piece Qty | Description                                   |
|------------|--------------------|---|
| DSP-POSTER | 1                  | Basic 8 cam & groove poster with descriptions |

Fire Hydrant Accessories Display



PART #: FD-RETAILKIT

- Features
- Retail packaging
  - Retail display signage
  - UPC codes

NOTE: Shelving purchased separately, see pg. 49

### Synthetic Single Jacket Mill Hose



| Part #    | Required Piece Qty | Description  |
|-----------|--------------------|--|
| M20-50GAX | 2                  | 2" x 50' single jacket mill hose with 2" aluminum female x male cam & groove couplings |

### Synthetic Single Jacket Mill Hose



| Part #    | Required Piece Qty | Description   |
|-----------|--------------------|---|
| M15-50RAF | 2                  | 1-1/2" x 50' single jacket mill hose with 1-1/2" NST male x female expansion ring couplings |

### Bumpered Brass Fog Nozzles



| Part #    | Required Piece Qty | Description                          |
|-----------|--------------------|--------------------------------------|
| FD-BBN100 | 2                  | 1" NPSH brass fog nozzle with bumper |

### Brass Industrial Fog Nozzle



| Part #    | Required Piece Qty | Description                              |
|-----------|--------------------|--|
| FD-BFN150 | 2                  | 1-1/2" NPSH brass fog nozzle with bumper |

### Brass Industrial Fog Nozzle



| Part #       | Required Piece Qty | Description                             |
|--------------|--------------------|---|
| FD-BFN150NST | 2                  | 1-1/2" NST brass fog nozzle with bumper |

**Polycarbonate Fog Nozzle with Bumper**

| Part #     | Required Piece Qty | Description                             |
|------------|--------------------|---|
| FD-FNB150S | 3                  | 1-1/2" NPSH red poly nozzle with bumper |



**Polycarbonate Fog Nozzle with Bumper**

| Part #       | Required Piece Qty | Description                            |
|--------------|--------------------|--|
| FD-FNB150NST | 3                  | 1-1/2" NST red poly nozzle with bumper |



**Polycarbonate Fog Nozzle with Bumper**

| Part #      | Required Piece Qty | Description                          |
|-------------|--------------------|--------------------------------------|
| FD-FNB75GHT | 3                  | 3/4" GHT red poly nozzle with bumper |



**Hydrant Adapter Pin Lug Brass**

| Part #     | Required Piece Qty | Description                                   |
|------------|--------------------|---|
| FD-HA2520T | 3                  | 2-1/2" female NST x 2" male NPT brass adapter |



**Hydrant Adapter Pin Lug Brass**

| Part #     | Required Piece Qty | Description                                       |
|------------|--------------------|---|
| FD-HA2515F | 3                  | 2-1/2" female NST x 1-1/2" male NST brass adapter |





### Hydrant Adapter Pin Lug Brass



| Part #     | Required Piece Qty | Description                                       |
|------------|--------------------|---|
| FD-HA2515T | 3                  | 2-1/2" female NST x 1-1/2" male NPT brass adapter |



### Hydrant Adapter Pin Lug Brass

| Part #    | Required Piece Qty | Description                                     |
|-----------|--------------------|---|
| FD-HA1576 | 3                  | 1-1/2" female NST x 3/4" male GHT brass adapter |



### Hydrant Adapter Pin Lug Brass

| Part #     | Required Piece Qty | Description                                       |
|------------|--------------------|---|
| FD-HA2525T | 3                  | 2-1/2" female NST x 2-1/2" male NPT brass adapter |



### Hydrant Adapter Pin Lug Brass

| Part #      | Required Piece Qty | Description                                       |
|-------------|--------------------|---|
| FD-HA15T15F | 3                  | 1-1/2" female NPT x 1-1/2" male NST brass adapter |



### Hydrant Adapter Pin Lug Brass

| Part #    | Required Piece Qty | Description                                     |
|-----------|--------------------|---|
| FD-HA2576 | 3                  | 2-1/2" female NST x 3/4" male GHT brass adapter |

**Heavy Duty Adjustable Hydrant Wrench**

| Part # | Required Piece Qty | Description                          |
|--------|--------------------|--------------------------------------|
| FD-189 | 3                  | Heavy duty adjustable hydrant wrench |



**5 Hole Hydrant Wrench**

| Part # | Required Piece Qty | Description           |
|--------|--------------------|-----------------------|
| FD-PHW | 3                  | 5 hole hydrant wrench |



**Square Hydrant Wrench**

| Part #      | Required Piece Qty | Description           |
|-------------|--------------------|-----------------------|
| FD-DF16-180 | 3                  | Square hydrant wrench |



**Brass Pin Lug Cap**

| Part #    | Required Piece Qty | Description                            |
|-----------|--------------------|--|
| FD-FC250F | 3                  | 2-1/2" NST female brass cap with chain |



**Brass Pin Lug Cap**

| Part #    | Required Piece Qty | Description                            |
|-----------|--------------------|--|
| FD-FC150F | 3                  | 1-1/2" NST female brass cap with chain |





### Brass Pin Lug Plug

| Part #    | Required Piece Qty | Description                           |
|-----------|--------------------|---------------------------------------|
| FD-FP250F | 3                  | 2-1/2" NST male brass plug with chain |



### Brass Pin Lug Plug

| Part #    | Required Piece Qty | Description                           |
|-----------|--------------------|---------------------------------------|
| FD-FP150F | 3                  | 1-1/2" NST male brass plug with chain |

### Fire Hydrant Accessories End Cap Sign



| Part #  | Required Piece Qty | Description       |
|---------|--------------------|-------------------|
| FD-SIGN | 1                  | Fire end cap sign |

### End Cap Sign Holder



| Part #     | Required Piece Qty | Description         |
|------------|--------------------|---------------------|
| SIGNHOLDER | 2                  | End cap sign holder |

## Dixon Gauge Display



Our rugged steel case provides a fresh way to showcase some of your top selling Dixon gauges.

**Application**

- Pumps, hydraulic and pneumatic systems, compressors, machine tools, and other industrial applications

**Size**

- Display dimensions 12" height x 17" length x 5" width

**Features**

- Designed for long, reliable service under rugged conditions
- Customizable to fit all 2-1/2" face, 1/4" lower mounted Dixon gauges
- Displays up to 5 gauges with storage for 35
- Complete selection of gauges available on DPL122 pages 344-356; most popular gauges shown here



Display

| Height | Length | Width | Part #                    |
|--------|--------|-------|---------------------------|
| 12"    | 17"    | 5"    | GD-RETAILKIT <sup>1</sup> |

<sup>1</sup> Display only, gauges not included

### Dry Gauges

| Face Size | Case Material   | Part #  |
|-----------|-----------------|---------|
| 2-1/2"    | brass           | GBR30   |
|           | ABS             | GL305   |
|           | ABS             | GL330   |
|           | ABS             | GL340FG |
|           | stainless steel | GSS100  |

### Liquid Filled

| Face Size | Case Material   | Part #  |
|-----------|-----------------|---------|
| 2-1/2"    | ABS             | GLP515  |
|           | stainless steel | GLS415  |
|           | stainless steel | GLSS100 |
|           | brass           | GLBR100 |



### E-Series Hydraulic Couplings

**Features**

- Couplers have no internal valves, which provides maximum flow with minimum pressure drop
- Contact Dixon® for additional seal material options
- Contact Dixon for pressure ratings and other technical information
- Interchanges with Parker ST, Foster FST, Hansen ST, and Tomco ST couplings
- Do not disconnect with pressure in line



**Specification**

- Nitrile rubber seals are standard, providing a temperature range of -40°F to 250°F (-40°C to 121°C)


#### Straight Through Female Threaded Couplers

| Body Size | Threads        | Required Case Qty | Brass Part # |
|-----------|----------------|-------------------|--------------|
| 1/4"      | 1/4" - 18 NPTF | 20                | PW-2EF2-B    |
| 3/8"      | 3/8" - 18 NPTF | 20                | PW-3EF3-B    |




#### Straight Through Male Threaded Couplers

| Body Size | Threads        | Required Case Qty | Brass Part # |
|-----------|----------------|-------------------|--------------|
| 1/4"      | 1/4" - 18 NPTF | 20                | PW-2EM2-B    |
| 3/8"      | 3/8" - 18 NPTF | 20                | PW-3EM3-B    |



#### Straight Through Female Threaded Plugs

| Body Size | Threads        | Required Case Qty | Steel Part # | Brass Part # |
|-----------|----------------|-------------------|--------------|--------------|
| 1/4"      | 1/4" - 18 NPTF | 20                | ---          | PW-E2F2-B    |
| 3/8"      | 3/8" - 18 NPTF | 20                | PW-E3F3      | PW-E3F3-B    |



#### Straight Through Male Threaded Plugs

| Body Size | Threads        | Required Case Qty | Steel Part # | Brass Part # |
|-----------|----------------|-------------------|--------------|--------------|
| 1/4"      | 1/4" - 18 NPTF | 20                | ---          | PW-E2M2-B    |
| 3/8"      | 3/8" - 18 NPTF | 20                | PW-E3M3      | PW-E3M3-B    |



#### Pressure Washer Display Blue Bins

**Application**

- To be used with E-Series hydraulic couplings above

| Description                                | Required Case Qty | Part #      |
|--|-------------------|-------------|
| 1 bin with bin labels - 11" x 8" x 7"      | 1                 | PW-BLU-BINS |
| 10 bins with bin labels - 7-1/2" x 4" x 3" | 1                 |             |



### Swiveling Quick Couplings

**Application**

- For use with AL456 only

**Specifications**

- Working pressure: **3,650 PSI**
- Flow rate: **7.8 GPM**
- Maximum temperature: **300°F (149°C)**



PW-AL450



PW-AL453

| Description                         | Required Case Qty | Part #   |
|-------------------------------------|-------------------|----------|
| 1/4" female x 22 mm x 1.5 mm swivel | 4                 | PW-AL450 |
| 3/8" female x 22 mm x 1.5 mm swivel | 4                 | PW-AL453 |

### Fixed Quick Coupling Plugs

**Application**

- For use with AL453 and AL9 only

**Specifications**

- Working pressure: **3,650 PSI**
- Flow rate: **7.8 GPM**
- Maximum temperature: **300°F (149°C)**



PW-AL454



PW-AL456

| Description                       | Required Case Qty | Part #   |
|-----------------------------------|-------------------|----------|
| 1/4" female x 22 mm x 1.5 mm male | 4                 | PW-AL454 |
| 3/8" female x 22 mm x 1.5 mm male | 4                 | PW-AL456 |

### Quick Connect Spray Nozzles



| Description  | Required Case Qty | Part #    |
|--|-------------------|-----------|
| 1/4" straight through plug inlet, 0° spray angle, size #4, red     | 4                 | PW-MSP400 |
| 1/4" straight through plug inlet, 15° spray angle, size #4, yellow | 4                 | PW-MSP415 |
| 1/4" straight through plug inlet, 25° spray angle, size #4, green  | 4                 | PW-MSP425 |
| 1/4" straight through plug inlet, 40° spray angle, size #4, white  | 4                 | PW-MSP440 |

### Multi-Pack Quick Connect Nozzles



| Description                            | Nozzles Included | Required Case Qty | Part #     |
|--|------------------|-------------------|------------|
| 1/4", 65° spray angle, size #40        | NZ6540QCS        | 4                 | PW-MSP4PAK |
| 1/4", 15° spray angle, size #4, yellow | MSP415           |                   |            |
| 1/4", 25° spray angle, size #4, green  | MSP425           |                   |            |
| 1/4", 40° spray angle, size #4, white  | MSP440           |                   |            |

### Turbo Nozzles

**Features**

- 20° spray angle
- Ceramic orifice

**Specification**

- Maximum temperature: 212°F (100°C)

| Nozzle Size | Description       | Orifice | Maximum Working PSI | Required Case Qty | Part #         |
|-------------|-------------------|---------|---------------------|-------------------|----------------|
| 4.0         | 1/4" female inlet | 1.30 mm | 3,700               | 2                 | PW-AL-TPR25-30 |
| 6.0         | 1/4" female inlet | 1.50 mm | 3,700               | 2                 | PW-AL-TPR25-50 |



PW-AL-TPR25-30



PW-AL-TPR25-50

### Pressure Washer Spray Nozzles

| Description   | Required Case Qty | Part #     |
|---|-------------------|------------|
| 1/4" male inlet, 40° spray angle, size #40, brass   | 4                 | PW-NZ4040S |
| 1/4" male inlet, 80° spray angle, size #40, brass   | 4                 | PW-NZ8040S |
| 1/4" male NPT inlet, 15° spray angle, size 4, steel | 4                 | PW-NZ1504  |
| 1/4" male NPT inlet, 25° spray angle, size 4, steel | 4                 | PW-NZ2504  |
| 1/4" male NPT inlet, 40° spray angle, size 4, steel | 4                 | PW-NZ4004  |



### Pressure Spray Gun Anti-Fatigue

**Sizes**

- 3/8" female inlet
- 1/4" female outlet

**Feature**

- Anti-fatigue pressure compensating design

**Specification**

- Temperatures to: 320°F (160°C)

| Maximum PSI | GPM  | Required Case Qty | Part #  |
|-------------|------|-------------------|---------|
| 5075        | 12.0 | 4                 | PW-HPSG |





### Pressure Spray Gun - Molded Grip Extension



PW-AL323XX



PW-AL324XX

**Application**

- For use with HPSG, HPSGC, HPSGHD, and HPSGW

**Specifications**

- Maximum operating pressure: **5,000 PSI**
- Temperature: **302°F (150°C)**
- Maximum flow rate: **10.5 GPM**

| Length | Description   | Required Case Qty | Zinc Part # |
|--------|---|-------------------|-------------|
| 24"    | 1/4" male inlet x 1/4" male outlet                        | 4                 | PW-AL323XX  |
| 36"    | 1/4" male inlet x 1/4" male outlet, 4" space from the end | 4                 | PW-AL324XX  |



### Poster

| Description                        | Required Case Qty | Part #    |
|------------------------------------|-------------------|-----------|
| Pressure washer accessories poster | 1                 | PW-POSTER |

### Sign Holder



| Description         | Required Case Qty | Part #     |
|---------------------|-------------------|------------|
| End cap sign holder | 2                 | SIGNHOLDER |

### End Cap Sign



| Description                              | Required Case Qty | Part #  |
|--|-------------------|---------|
| Pressure washer accessories end cap sign | 1                 | PW-SIGN |

### Shelf Graphic



| Description          | Required Case Qty | Part #       |
|----------------------|-------------------|--------------|
| Dixon® shelf graphic | 2                 | SHELFGRAPHIC |

### Garden Hose Display

The garden hose fittings display offers a range of adapters and connectors, along with two styles of hoses. This display reminds your customers of their garden hose-related needs: demanding industrial clean up or at-home projects.



#### PART #: GHD-RETAILKIT

#### Features

- Retail packaging
- Retail display signage
- Posters
- Barcodes

NOTE: Shelving purchased separately, see pg. 49

"The packaging and organized Dixon display helped sell products we had in stock but rarely sold. Customers like how easy it is to grab the packages right off the rack."

- Scott, New Hampshire

### GHT Ball Valve



**Specifications**

- Maximum temperature: **140°F (60°C)** (hot water)
- Working pressure: **100 PSI**

| Description              | Required Case Qty | Forged Brass Part # |
|--------------------------|-------------------|---------------------|
| 3/4" male NH x female NH | 6                 | GHD-500GHV          |

### Quick Connects

**Feature**

- Easy push-pull ring for long-lasting and quick hose attachments

**Specifications**

- Maximum operating pressure: **150 PSI** at ambient temperature **70°F (21°C)**
- Maximum temperature: **140°F (60°C)**



| Description   | Required Case Qty | Kit Contains Part # | Brass Part # |
|---|-------------------|---------------------|--------------|
| Complete assembly, female GHT coupler x male GHT plug | 6                 | 500QCF              | GHD-500QCK   |
|   |                   | 500QCM (2)          |              |

### Short Shank Fittings

**Features**

- Extended male GHT - deeper thread
- Heavy duty Hex nut with knurl



| Hose Size | Required Case Qty | Kit Contains Part # | Brass Part # |
|-----------|-------------------|---------------------|--------------|
| 3/4"      | 6                 | 5851212C            | GHD-5891212K |
|           |                   | 5881212C            |              |

### Menders

**Specifications**

- Working pressure: **250 PSI** maximum @ **72°F (22°C)**
- Operating temperature range: **-40°F to 160°F (-40°C to 71°C)** at **150 PSI** maximum



| Hose Size | Required Case Qty | Kit Contains Part # | Brass Part # |
|-----------|-------------------|---------------------|--------------|
| 3/4"      | 6                 | 1781212C (2)        | GHD-1781212C |

### Sweeper Nozzle



| Thread Size | Discharge | Length | Required Case Qty | Brass Part # |
|-------------|-----------|--------|-------------------|--------------|
| 3/4" GHT    | 3/16"     | 2"     | 6                 | GHD-PSN76    |

### Adjust-A-Power Nozzle

**Application**

- Ideal for patio, auto and boat, driveway, and garden

**Features**

- Produces 50% more power than twist nozzles
- Does not require a washer
- Leave nozzle in the open position when not in use
- Brass construction with stainless steel bearings



**Specification**

- Maximum operating pressure: **100 PSI** (water only) at ambient temperature **70°F (21°C)**

| Thread Size | Required Case Qty | Brass Part #  |
|-------------|-------------------|---------------|
| 3/4" GHT    | 6                 | GHD-AAPN75GHT |

## Twist Nozzles

### Specification

- Maximum operating pressure **150 PSI** (water only)

| Thread Size | Length | Required Case Qty | Extruded Brass Part # |
|-------------|--------|-------------------|-----------------------|
| 3/4" GHT    | 4"     | 6                 | GHD-500AN4            |



## Insulated Water Nozzles

### Features

- Clip locks to any spray pattern
- Industrial strength nylon handle
- Rubber handle guard
- GHT thread-on head
- Heavy-duty brass valve and adjusting nut

### Specification

- For use with hot water up to **140°F (60°C)**

| Thread Size | Required Case Qty | Chrome-Plated Zinc Part # |
|-------------|-------------------|---------------------------|
| 3/4" GHT    | 4                 | GHD-SN75                  |



## Washers

### Filter Washer

| Description                                      | Kit Contains Part # | Required Case Qty | FDA black PVC duro, 70a Part # |
|--|---------------------|-------------------|--------------------------------|
| 304 stainless steel mesh, FDA black 70a duro PVC | 5911212F (4)        | 6                 | GHD-5911212F                   |



### Black SBR Washer

| ID    | OD    | duro | Kit Contains Part # | Required Case Qty | Black SBR Part # |
|-------|-------|------|---------------------|-------------------|------------------|
| 0.63" | 1.00" | 80   | 5911212W (4)        | 100               | GHD-5911212W     |



## Female Swivel GHT Adapter

| Female x Female | Required Case Qty | Brass Part # |
|-----------------|-------------------|--------------|
| 3/4" x 3/4"     | 6                 | GHD-5061212C |



## Hydrant Adapters - Pin Lug

| Female NH | Male GHT | Required Case Qty | Cast Brass Part # |
|-----------|----------|-------------------|-------------------|
| 1-1/2"    | 3/4"     | 4                 | GHD-HA1576        |
| 2-1/2"    | 3/4"     | 4                 | GHD-HA2576        |





### Y Coupler

**Specifications**

- Maximum working pressure: **100 PSI**
- Maximum temperature: **140°F (60°C)**

| Required Case Qty | Nickel-Plated Brass Part # |
|-------------------|----------------------------|
| 6                 | GHD-500YC                  |

**NOTE:** This part will be listed as obsolete when stock is depleted. Updated part number will be 500YCF



### Y Valve

**Feature**

- Double Y valve, swivel inlet - with Higbee cut threads (capped) to prevent cross threading

**Specifications**

- Maximum temperature: **140°F (60°C)** (hot water)
- Working pressure: **100 PSI**

| Description                  | Required Case Qty | Forged Brass Part # |
|------------------------------|-------------------|---------------------|
| Double male GHT x female GHT | 6                 | GHD-500GHY          |



### Plain Hose Nozzles

**Feature**

- Finish: satin

**Specification**

- Maximum operating pressure: **100 PSI** (water only) at **70°F (21°C)**

| Size | Thread | Overall Length | Orifice | Required Case Qty | Brass Part # |
|------|--------|----------------|---------|-------------------|--------------|
| 3/4" | GHT    | 6"             | 1/4"    | 6                 | GHD-BN6      |



### GHT 4-Valve Manifold

**Feature**

- Swivel inlet

**Materials**

- Forged brass body, TPR handle, POM internal valve NBR seals

**Specifications**

- Maximum temperature: **120°F (49°C)**
- Maximum operating pressure: **100 PSI**

| Description              | Required Case Qty | Part #        |
|--------------------------|-------------------|---------------|
| (4) male GH x female GHT | 4                 | GHD-500GH4VBK |

### Constant Flow Nozzle Displays

**Application**

- Shatter-resistant and UV resistant polycarbonate is able to withstand tough environmental conditions

**Features**

- Seals used for true water shut off
- Easy twist spray pattern adjustment
- Sold in case quantity only (25 per case), with display



| Thread   | 45° Spray GPM @ 100 PSI | Color | Required Case Qty | Part #          |
|----------|-------------------------|-------|-------------------|-----------------|
| 3/4" GHT | 25.1                    | clear | 1                 | GHD-CNB75GHT-GD |
| 3/4" GHT | 25.1                    | green | 1                 | FNB75GHT-GD     |

## Worm Gear Clamps

### Features

- Four-piece construction
- Screw design: 5/16" slotted hex head
- Maximum recommended torque: 50 in-lbs
- All clamps sold 10 per box

### Materials

- Band and housing: SAE 300 series stainless
- Screw: SAE 300 series stainless

### Approval

- Clamp meets SAEJ1508, which supersedes Mil Spec WW-C-440B



| Band Width | Hose OD |         | Kit Contains Part # | Required Case Qty | Part #    |
|------------|---------|---------|---------------------|-------------------|-----------|
|            | from    | to      |                     |                   |           |
| 1/2"       | 1/2"    | 29/32"  | HSS8                | 40                | GHD-HSS8  |
|            | 11/16"  | 1-1/14" | HSS12               | 40                | GHD-HSS12 |

## Rubber Vinyl Garden Hose

### Features

- Extra tough, five-ply construction
- Exclusive, soft textured, abrasion-resistant green cover
- Dual reinforced, heavy-duty, flexible kink-resistance
- Combines durability of rubber and easy handling of vinyl
- SEAL-TITE leakproof coupling

### Specifications

- Working pressure: **400 PSI**
- Temperature range: **0°F to 140°F (-18°C to 60°C)**



| Size       | Required Case Qty | Rubber Vinyl Part # |
|------------|-------------------|---------------------|
| 5/8" x 50' | 2                 | GHD-SGH50           |

## Contractors EPDM Water Hose

### Features

- Heavy-duty, crush-proof solid brass couplings with wrench grips
- Spiral synthetic cord reinforcement
- Black cover

### Specifications

- Working pressure: **150 PSI**
- Temperature range: **-20°F to 180°F (-29°C to 82°C)**



| Size       | Required Case Qty | EPDM Part # |
|------------|-------------------|-------------|
| 3/4" x 50' | 2                 | GHD-CWH50   |

### Poster



| Description                 | Required Case Qty | Part #     |
|-----------------------------|-------------------|------------|
| Garden hose fittings poster | 1                 | GHD-POSTER |

### Sign Holder



| Description         | Required Case Qty | Part #     |
|---------------------|-------------------|------------|
| End cap sign holder | 2                 | SIGNHOLDER |

### End Cap Sign



| Description                       | Required Case Qty | Part #   |
|-----------------------------------|-------------------|----------|
| Garden hose fittings end cap sign | 1                 | GHD-SIGN |

### Shelf Graphic



| Description         | Required Case Qty | Part #       |
|---------------------|-------------------|--------------|
| Dixon shelf graphic | 2                 | SHELFGRAPHIC |

### Pneumatic Display

The pneumatic fittings display offers several parts, from FRLs to quick disconnects, while keeping a single product focus. This display gives your customers the flexibility to choose which fittings work best with their pneumatic systems.



#### PART #: PND-RETAILKIT

##### Features

- Retail packaging
- Retail display signage
- Posters
- Barcodes

NOTE: Shelving purchased separately, see pg. 49

"After I set the Dixon display up, I realized it was helping me sell other products. When I put them all together, I saw a huge jump in sales. I've never seen FRLs sell so quickly."

- Paul, Massachusetts



### B07 Carded Miniature Filter/Regulators



**Features**

- Relieving type
- 5 micron element
- 1 oz. reservoir
- Push to lock adjusting knob
- Supplied with a GC620 gauge
- Bowl guard not available
- Transparent bowl

**Specifications**

- Pressure range: **5-100 PSI**
- Inlet pressure: **150 PSI** maximum
- Maximum temperature: **125°F (52°C)**

| Port Size | Flow (SCFM) | Required Case Qty | Automatic Drain Part # | Manual Drain Part # |
|-----------|-------------|-------------------|------------------------|---------------------|
| 1/4"      | 14          | 4                 | PND-B07-202AGC         | PND-B07-202MGC      |

### F07 Carded Miniature Filters



**Features**

- 5 micron element
- 1 oz. reservoir
- Transparent bowl

**Specifications**

- Inlet pressure: **150 PSI** maximum
- Maximum temperature: **125°F (52°C)**

| Port Size | Flow (SCFM) | Required Case Qty | Automatic Drain Part # | Manual Drain Part # |
|-----------|-------------|-------------------|------------------------|---------------------|
| 1/4"      | 24          | 4                 | PND-F07-200AC          | PND-F07-200MC       |

### R07 Carded Miniature Regulator



**Features**

- Relieving type
- Supplied with a GC620 gauge

**Specifications**

- Pressure range: **5-100 PSI**
- Inlet pressure: **250 PSI** maximum
- Maximum temperature: **150°F (66°C)**

| Port Size | Flow (SCFM) | Required Case Qty | With Gauge Part # |
|-----------|-------------|-------------------|-------------------|
| 1/4"      | 15          | 4                 | PND-R07-200RGC    |

### L07 Carded Miniature Lubricator



**Feature**

- 1 oz. reservoir

**Specifications**

- Inlet pressure: **150 PSI** maximum
- Maximum temperature: **125°F (52°C)**

| Port Size | Flow (SCFM) | Required Case Qty | With Transparent Bowl Part # |
|-----------|-------------|-------------------|------------------------------|
| 1/4"      | 14          | 4                 | PND-L07-200AC                |

SCFM ratings given at 100 PSIG inlet pressure for regulators, 90 PSIG for others.



FRLs are designed for air service only, unless otherwise indicated.

## Heavy Duty Tire Pressure Gauge

**Size**

- 12" hose with swivel dual foot chuck inflator

**Feature**

- Tapered chuck nut fits wheel cover holes on cars and light trucks

**Specification**

- Calibrated in 2 PSI increments from 10 to 120 PSI

| Required Case Qty | Part #   |
|-------------------|----------|
| 3                 | PND-D101 |



## Tire Inflator Chuck

**Application**

- For direct connection to live air only

**Features**

- Ball foot chuck
- Features a built-in shutoff valve (will not work on inflator gauges)

**Specifications**

- 1/4" NPT female thread
- Maximum pressure: 150 PSI

| Required Case Qty | Brass Part # |
|-------------------|--------------|
| 6                 | PND-D104     |



## Dual Foot Tire Pressure Gauges

**Feature**

- Heavy-duty hang-up ring

**Specification**

- Calibrated in 2 PSI increments from 10 to 150 PSI

| Required Case Qty | Part #   |
|-------------------|----------|
| 6                 | PND-DFG2 |



## Professional Tire Pressure Gauge

**Features**

- Permanently lubricated
- Easy to read, dual calibrated (PSI and kPa), four-sided nylon indicator bar
- Pocket clip

**Material**

- Body is made of chrome-plated brass; head is chrome-plated zinc

**Specification**

- Calibrated in 1 PSI increments from 5 to 45 PSI

| Required Case Qty | Part #   |
|-------------------|----------|
| 6                 | PND-DFG5 |



## Male NPTF x Hose Barb

**Specification**

- Working pressure: 250 PSI maximum @ 72°F (22°C)
- Operating temperature range: -40°F to 160°F (-40°C to 71°C) at 150 PSI maximum

| Hose ID | Male NPTF | Required Case Qty | Kit Contains Part # | Brass Part # |
|---------|-----------|-------------------|---------------------|--------------|
| 3/8"    | 1/4"      | 6                 | 1020604C (4)        | PND-1020604C |



### 5 Part Kit DF-Series Industrial 1/4" Body x 1/4" Thread



| Body Size | Threads        | Required Case Qty | Kit Contains Part # | Part #      |
|-----------|----------------|-------------------|---------------------|-------------|
| 1/4"      | 1/4" - 18 NPTF | 6                 | D2F2                | PND-DQCKIT1 |
|           |                |                   | 2FF2-B              |             |
|           |                |                   | D2M2 (3)            |             |
| 1/4"      | 1/4" - 18 NPTF | 6                 | D2F2                | PND-DQCKIT2 |
|           |                |                   | 2DF2-B              |             |
|           |                |                   | D2M2 (3)            |             |

### 2 Part Kit M-Series ARO 1/4" Body x 1/4" Thread



| Body Size | Threads       | Required Case Qty | Kit Contains Part # | Part #      |
|-----------|---------------|-------------------|---------------------|-------------|
| 1/4"      | 1/4" - 18 NPT | 6                 | 2MF2-B              | PND-DQCKIT3 |
|           |               |                   | M2M2                |             |

### 2 Part Kit J-Series Automotive 1/4" Body x 1/4" Thread



| Body Size | Threads       | Required Case Qty | Kit Contains Part # | Part #      |
|-----------|---------------|-------------------|---------------------|-------------|
| 1/4"      | 1/4" - 18 NPT | 6                 | 2JF2-B              | PND-DQCKIT4 |
|           |               |                   | J2M2                |             |

### 2 Part Kit DF-Series Industrial 1/4" Body x 1/4" Thread



| Body Size | Threads        | Required Case Qty | Kit Contains Part # | Part #      |
|-----------|----------------|-------------------|---------------------|-------------|
| 1/4"      | 1/4" - 18 NPTF | 6                 | D2M2                | PND-DQCKIT5 |
|           |                |                   | 2FF2-B              |             |

### 2 Part Kit DF-Series Industrial 1/4" Body x 1/4" Thread



| Body Size | Threads        | Required Case Qty | Kit Contains Part # | Part #      |
|-----------|----------------|-------------------|---------------------|-------------|
| 1/4"      | 1/4" - 18 NPTF | 6                 | 2FM2-B              | PND-DQCKIT6 |
|           |                |                   | D2F2                |             |

### Non-Safety Rubber Tip Blow Gun

The rubber tip will not scratch or mar delicate surfaces. The conical rubber tip can also be used to create a seal between the blow gun and fluid lines (or any other opening). The base of the tip is nickel-plated brass for additional corrosion resistance. *Must be used on air lines having a maximum regulated pressure of 30 PSI in order to comply with OSHA Standard 1910.242 (B). Safety glasses or shield must be worn when using any blow gun.*



**Features**

- Chrome plated zinc die cast body, nickel plated steel lever, vinyl thumb grip, stainless steel spring, brass valve, nitrile rubber seals, and rubber tip with a nickel plated brass base provide corrosion resistance



| Required Case Qty | Part #   |
|-------------------|----------|
| 6                 | PND-D201 |

### Air Chief Safety Blow Gun

The Air Chief safety blow gun is designed to conform to OSHA Standard 1910.242 (B) permitting a maximum of 30 PSI outlet pressure when dead ended based on a maximum of 150 PSI inlet pressure, as well as OSHA Standard 1910.95 regulating occupational noise level exposure. *Safety glasses or shield must be worn when using any blow gun.*



**Features**

- Recessed internal slotted screw allows easy access to valve assembly for repairs or replacement
- Chrome plated zinc die cast body, nickel-plated steel lever, vinyl thumb grip, stainless steel spring, brass valve, nitrile rubber seals, and nickel plated brass tip combine for corrosion resistance



| Required Case Qty | Part #      |
|-------------------|-------------|
| 6                 | PND-D204-30 |

### 3 in 1 Manifolds

**Features**

- Supplies three air-operated tools from a single hose permitting use of air by more than one mechanic
- Can be mounted to a pipe at workbench or overhead
- Different tools in the shop use different styles of couplers; mount three different style couplers on one manifold



| NPT Inlet (1) | NPT Outlets (3) | Required Case Qty | Aluminum Part # |
|---------------|-----------------|-------------------|-----------------|
| 3/8"          | 1/4"            | 6                 | PND-D3406       |

### Pinch-On Clamp Service Kit

**Features**

- Plastic kit box contains zinc plated 2-ear clamps: 15 of part #0709, 15 of part #0811, 15 of part #1113, 15 of part #1315, 15 of part #1518, 12 of part #1720, 12 of part #2023, 12 of part #2225, 12 of part #2327, and 1 pair of standard jaw pincers, part# 1098



| Required Case Qty | Part #     |
|-------------------|------------|
| 2                 | PND-SK1098 |

### ABS Standard Dry Gauges Kit-Retail Package



| Description                 | Kit Contains Part # | Required Case Qty | ABS Part #    |
|-----------------------------|---------------------|-------------------|---------------|
| Dry gauge center back mount | GC230 (4)           | 1                 | PND-GAUGEKIT1 |
| Dry gauge lower mount       | GL130 (7)           |                   |               |

### Polyurethane Air Hose (fittings included)



**Features**

- Durable and lightweight
- Reinforced braid allows for higher working pressure
- Excellent flexibility
- Oil resistant
- Durometer: Shore A 85

**Specifications**

- Temperature range: -40°F to 155°F (-40°C to 68°C)
- Working pressure: 210 PSI at 70°F (21°C)

| Hose ID | Length | Male NPT | Required Case Qty | Polyurethane Part # |
|---------|--------|----------|-------------------|---------------------|
| 1/4"    | 50'    | 1/4"     | 3                 | PND-450-4S          |

### Coil-Chief Self-Storing Air Hose (fittings included)



**Feature**

- Supplied with swivel on one end

**Material**

- Nylon construction

| Hose ID | Length | Male NPT | Working Pressure (PSI) @ 70°F (21°C) | Required Case Qty | Nylon Part # |
|---------|--------|----------|--------------------------------------|-------------------|--------------|
| 1/4"    | 12'    | 1/4"     | 185                                  | 3                 | PND-CC1412   |

### Polyurethane Self-Storing Air Hose (fittings included)



**Features**

- Extremely flexible; resists kinking
- Impervious to abrasions and oil
- Superior elasticity and coil memory
- Both ends swivel

| Hose ID | Length | Male NPT | Working Pressure (PSI) @ 70°F (21°C) | Required Case Qty | Polyurethane Part # |
|---------|--------|----------|--------------------------------------|-------------------|---------------------|
| 1/4"    | 25'    | 1/4"     | 145                                  | 3                 | PND-PU1425          |

**Air Tool Lubricants**

**Application**

- High-grade lubricant prolongs the service life of air tools, cylinders, and accessories

**Features**

- #10 weight lubricant
- Prohibits rust and removes moisture as it lubricates
- Non-corrosive, non-reactive, and does not decompose
- Easy pour spout helps prevent costly spills



| Size     | Required Case Qty | Part #      |
|----------|-------------------|-------------|
| 1 pint   | 4                 | PND-DATL016 |
| 1 gallon | 2                 | PND-DATL128 |

**Poster**



| Description               | Required Case Qty | Part #     |
|---------------------------|-------------------|------------|
| Pneumatic fittings poster | 1                 | PND-POSTER |

**Sign Holder**



| Description         | Required Case Qty | Part #     |
|---------------------|-------------------|------------|
| End cap sign holder | 2                 | SIGNHOLDER |

**End Cap Sign**



| Description                     | Required Case Qty | Part #   |
|---------------------------------|-------------------|----------|
| Pneumatic fittings end cap sign | 1                 | PND-SIGN |

**Shelf Graphic**



| Description         | Required Case Qty | Part #       |
|---------------------|-------------------|--------------|
| Dixon shelf graphic | 2                 | SHELFGRAPHIC |

### Hydraulic Display


The hydraulic display features the most popular poppet and flush face style quick disconnect fittings in an attractive packaging making it easily noticeable.

**PART #: RD-RETAILKIT**

**Features**

- Retail packaging
- Retail display signage
- Posters
- Barcodes

NOTE: Shelving purchased separately, see pg. 50

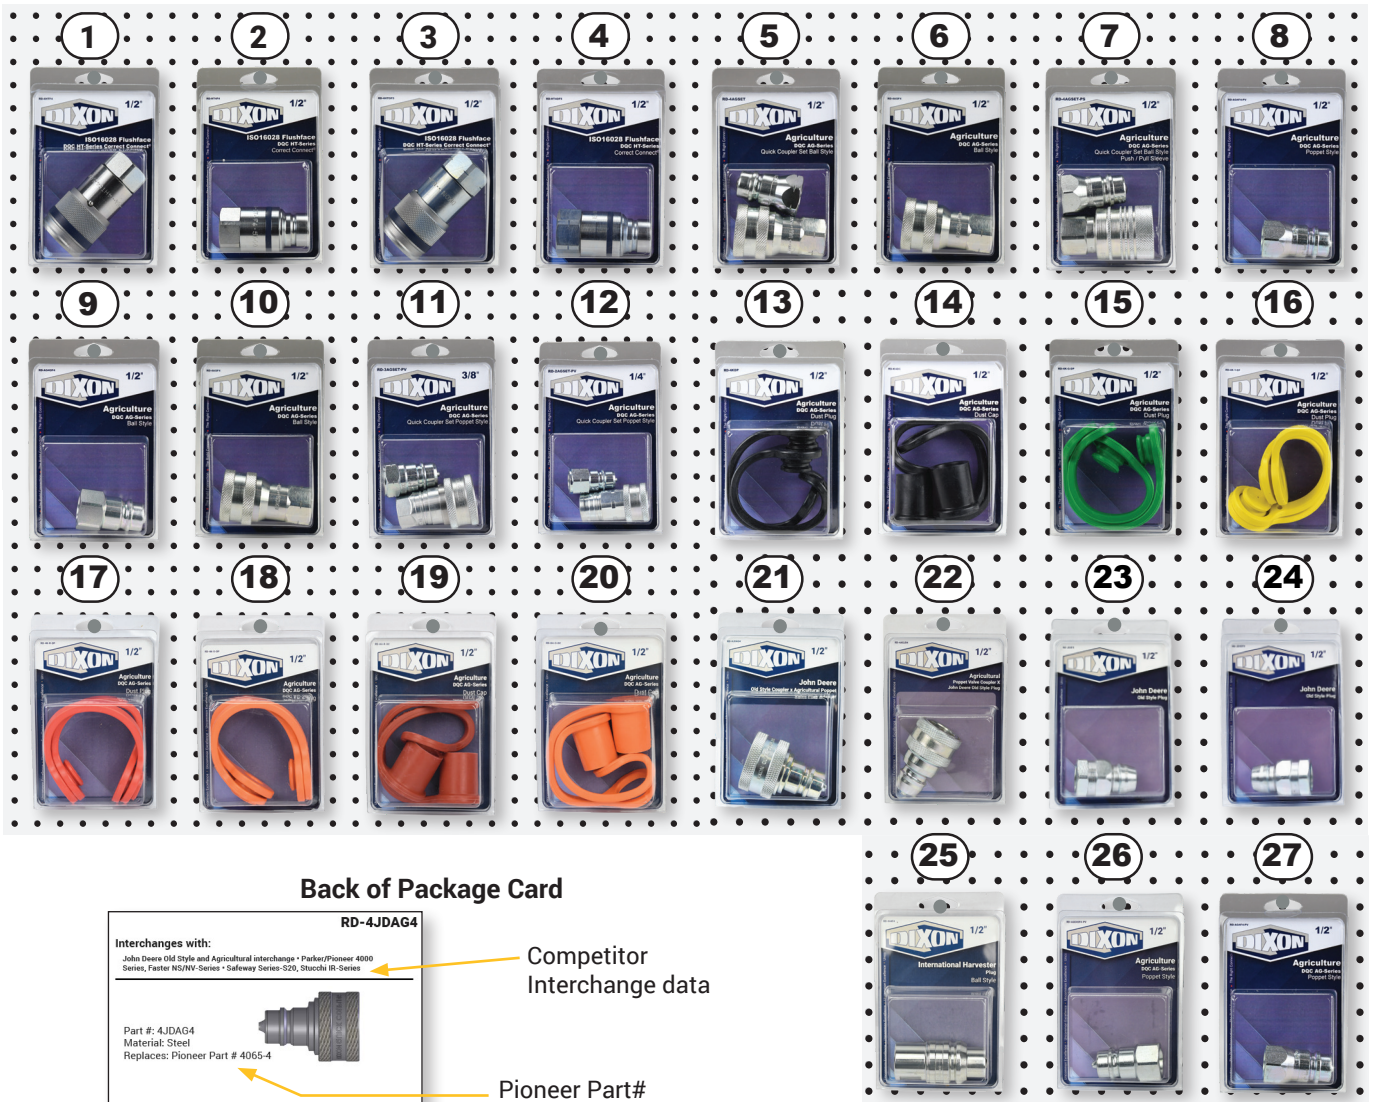

**Back of Package Card**



Competitor Interchange data

Pioneer Part# Replacement

UPC Code

Made in the USA

**HT-Series ISO16028 Coupler**

| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #   |
|-----------|-------------|-------------------|---------------------|----------|
| 1/2"      | 1/2" F-NPTF | 4                 | 4HTF4               | RD-4HTF4 |



**HT-Series ISO16028 Plug**

| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #   |
|-----------|-------------|-------------------|---------------------|----------|
| 1/2"      | 1/2" F-NPTF | 4                 | HT4F4               | RD-HT4F4 |



**HT-Series ISO16028 ORB Coupler**

| Body Size | Threads        | Required Case Qty | Kit Contains Part # | Part #    |
|-----------|----------------|-------------------|---------------------|-----------|
| 1/2"      | 7/8"-14 ORB    | 4                 | 4HTOF5              | RD-4HTOF5 |
| 1/2"      | 1-1/16"-12 ORB | 4                 | 4HTOF6              | RD-4HTOF6 |



**HT-Series ISO16028 ORB Plug**

| Body Size | Threads        | Required Case Qty | Kit Contains Part # | Part #    |
|-----------|----------------|-------------------|---------------------|-----------|
| 1/2"      | 7/8"-14 ORB    | 4                 | HT4OF5              | RD-HT4OF5 |
| 1/2"      | 1-1/16"-12 ORB | 4                 | HT4OF6              | RD-HT4OF6 |



**AG-Series Coupler and Plug Set**

| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #    |
|-----------|-------------|-------------------|---------------------|-----------|
| 1/2"      | 1/2" F-NPTF | 4                 | 4AGF4, AG4F4        | RD-4AGSET |



**AG-Series Coupler**

| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #   |
|-----------|-------------|-------------------|---------------------|----------|
| 1/2"      | 1/2" F-NPTF | 4                 | 4AGF4               | RD-4AGF4 |





### AG-Series Push-Pull Ball Coupler and Plug Set



| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #       |
|-----------|-------------|-------------------|---------------------|--------------|
| 1/2"      | 1/2" F-NPTF | 4                 | 4AGF4-PS, AG4F4     | RD-4AGSET-PS |

### AG-Series Poppet Plug



| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #      |
|-----------|-------------|-------------------|---------------------|-------------|
| 1/2"      | 1/2" F-NPTF | 4                 | AG4F4-PV            | RD-AG4F4-PV |

### AG-Series Ball ORB Plug



| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #    |
|-----------|-------------|-------------------|---------------------|-----------|
| 1/2"      | 3/4"-16 ORB | 4                 | AG40F4              | RD-AG40F4 |

### AG-Series Ball Plug



| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #   |
|-----------|-------------|-------------------|---------------------|----------|
| 1/2"      | 1/2" F-NPTF | 4                 | AG4F4               | RD-AG4F4 |

### AG-Series Poppet Coupler and Plug Set



| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #       |
|-----------|-------------|-------------------|---------------------|--------------|
| 3/8"      | 3/8" F-NPTF | 4                 | 3AGF3-PV, AG3F3-PV  | RD-3AGSET-PV |

### AG-Series Poppet Coupler and Plug Set



| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #       |
|-----------|-------------|-------------------|---------------------|--------------|
| 1/4"      | 1/4" F-NPTF | 4                 | 2AGF2-PV, AG2F2-PV  | RD-2AGSET-PV |

**AG-Series Dust Plug**

| Body Size | Color | Required Case Qty | Kit Contains Part # | Part #  |
|-----------|-------|-------------------|---------------------|---------|
| 1/2"      | black | 4                 | 4KDP (x2)           | RD-4KDP |



**AG-Series Dust Cap**

| Body Size | Color | Required Case Qty | Kit Contains Part # | Part #  |
|-----------|-------|-------------------|---------------------|---------|
| 1/2"      | black | 4                 | K4DC (x2)           | RD-K4DC |



**AG-Series Dust Plug - Green**

| Body Size | Color | Required Case Qty | Kit Contains Part # | Part #     |
|-----------|-------|-------------------|---------------------|------------|
| 1/2"      | green | 4                 | 4K-G-DP (x2)        | RD-4K-G-DP |



**AG-Series Dust Plug - Yellow**

| Body Size | Color  | Required Case Qty | Kit Contains Part # | Part #     |
|-----------|--------|-------------------|---------------------|------------|
| 1/2"      | yellow | 4                 | 4K-Y-DP (X2)        | RD-4K-Y-DP |



**AG-Series Dust Plug - Red**

| Body Size | Color | Required Case Qty | Kit Contains Part # | Part #     |
|-----------|-------|-------------------|---------------------|------------|
| 1/2"      | red   | 4                 | 4K-R-DP (x2)        | RD-4K-R-DP |



**AG-Series Dust Plug - Orange**

| Body Size | Color  | Required Case Qty | Kit Contains Part # | Part #     |
|-----------|--------|-------------------|---------------------|------------|
| 1/2"      | orange | 4                 | 4K-O-DP (x2)        | RD-4K-O-DP |



**AG-Series Dust Cap - Red**

| Body Size | Color | Required Case Qty | Kit Contains Part # | Part #     |
|-----------|-------|-------------------|---------------------|------------|
| 1/2"      | red   | 4                 | K4-R-DC (x2)        | RD-K4-R-DC |



**AG-Series Dust Cap - Orange**

| Body Size | Color  | Required Case Qty | Kit Contains Part # | Part #     |
|-----------|--------|-------------------|---------------------|------------|
| 1/2"      | orange | 4                 | K4-O-DC (x2)        | RD-K4-O-DC |



### JOHN DEERE® Coupler x AG-Series Poppet Valve Plug Adapter




| Body Size | Required Case Qty | Kit Contains Part # | Part #    |
|-----------|-------------------|---------------------|-----------|
| 1/2"      | 4                 | 4JDAG4              | RD-4JDAG4 |

### AG-Series Poppet Coupler x JOHN DEERE® Plug Adapter



| Body Size | Required Case Qty | Kit Contains Part # | Part #    |
|-----------|-------------------|---------------------|-----------|
| 1/2"      | 4                 | 4AGJD4              | RD-4AGJD4 |

### JOHN DEERE® Plug



| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #   |
|-----------|-------------|-------------------|---------------------|----------|
| 1/2"      | 1/2" F-NPTF | 4                 | JD4F4               | RD-JD4F4 |

### JOHN DEERE® Plug



| Body Size | Threads       | Required Case Qty | Kit Contains Part # | Part #    |
|-----------|---------------|-------------------|---------------------|-----------|
| 1/2"      | 3/4"-16 F-ORB | 4                 | JD40F4              | RD-JD40F4 |

Case IH® Plug

| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #   |
|-----------|-------------|-------------------|---------------------|----------|
| 1/2"      | 1/2" F-NPTF | 4                 | IH4F4               | RD-IH4F4 |



AG-Series Connect Under Pressure Plug

| Body Size | Threads       | Required Case Qty | Kit Contains Part # | Part #        |
|-----------|---------------|-------------------|---------------------|---------------|
| 1/2"      | 3/4"-16 F-ORB | 4                 | AGE40F4-PV          | RD-AGE40F4-PV |



AG-Series Connect Under Pressure Plug

| Body Size | Threads     | Required Case Qty | Kit Contains Part # | Part #       |
|-----------|-------------|-------------------|---------------------|--------------|
| 1/2"      | 1/2" F-NPTF | 4                 | AGE4F4-PV           | RD-AGE4F4-PV |



Sign Holder

| Description         | Required Case Qty | Part #     |
|---------------------|-------------------|------------|
| End cap sign holder | 2                 | SIGNHOLDER |



End Cap Sign

| Description                       | Required Case Qty | Part #   |
|-----------------------------------|-------------------|----------|
| Dixon Quick Coupling end cap sign | 1                 | DQC-SIGN |



## Outside Air Display

The outside air display features high demand construction hose couplings, whip hose assemblies, and other accessories.



**PART #: OA-RETAILKIT**

**Features**

- Retail packaging
- Retail display signage
- Posters
- Barcodes

NOTE: Shelving purchased separately, see pg. 49

Checkout our parts cross reference tool on our website.

[dixonvalve.com/en/knowledge-center/product-cross-reference](http://dixonvalve.com/en/knowledge-center/product-cross-reference)

**Air King® Safety Clip**

| Description                          | Required Case Qty | Contents | Part # |
|--------------------------------------|-------------------|----------|--------|
| Air King safety clip, diameter .080" | 5                 | AC1 (25) | OA-AC1 |



**Air King Lanyard**

| Description                         | Required Case Qty | Contents  | Part #  |
|-------------------------------------|-------------------|-----------|---------|
| Synthetic Air King lanyard 19" long | 5                 | ACL8 (25) | OA-ACL8 |



**Air King Washers**

| Description                           | Required Case Qty | Contents  | Part #  |
|---------------------------------------|-------------------|-----------|---------|
| Black natural rubber Air King washers | 5                 | AWR4 (10) | OA-AWR4 |



**Soft Seat Safety Pop-Off Valves**

| Description                                    | Required Case Qty | Contents  | Part #       |
|--|-------------------|-----------|--------------|
| 1/4" MNPT safety pop-off valve, brass, 125 PSI | 4                 | KSV10-125 | OA-KSV10-125 |
| 1/4" MNPT safety pop-off valve, brass, 150 PSI | 4                 | KSV10-150 | OA-KSV10-150 |



**Steel 3500 Male Nipples**

| Description                           | Required Case Qty | Contents | Part #  |
|---------------------------------------|-------------------|----------|---------|
| 1/2" barb x 1/2" male NPT 3500 nipple | 4                 | 3512     | OA-3512 |



**Dix-Lock® Seal Kit**

| Description       | Required Case Qty | Contents    | Part #     |
|-------------------|-------------------|-------------|------------|
| Dix-Lock seal kit | 5                 | 4N-SKIT (5) | OA-4N-SKIT |



**Dual-Lock Seal Kit**

| Description        | Required Case Qty | Contents    | Part #     |
|--------------------|-------------------|-------------|------------|
| Dual-Lock seal kit | 5                 | 4P-SKIT (5) | OA-4P-SKIT |



**Air King®**

**⚠ WARNING**

- The use of an Air King safety clip or wire type retainer is necessary to ensure Air King universal couplings will not become accidentally disconnected. This guarantees the fittings are properly connected because the safety pin will not go through the holes in mating flanges until couplings are locked in place. Only one Air King safety clip or wire type retainer is required for each Air King universal coupling.

**Feature**


- Supplied with safety clip, and rubber washers, part # AWR4

**Specification**

- Pressure rating: **150 PSI** at ambient temperature **70°F (21°C)**

**Approval**

- Meets pressure requirements as specified in A-A-59553 commercial item description superseding Mil Spec.WWC-633D



**2-Lug Male NPT Ends**

| Size | Required Case Qty | Iron Part # |
|------|-------------------|-------------|
| 3/4" | 6                 | AM7         |



**2-Lug Female NPT Ends**

| Size | Required Case Qty | Iron Part # |
|------|-------------------|-------------|
| 3/4" | 6                 | AM8         |



**2-Lug Hose Ends**

| Size | Required Case Qty | Iron Part # |
|------|-------------------|-------------|
| 3/4" | 6                 | AM6         |

**Air King Clamps**

**Application**

- For use with Air King ends above

**Feature**

- Torque values for clamps are based on dry bolts. The use of lubricant on bolts will adversely effect clamp performance.



| Hose ID | Hose OD |          | Required Case Qty | Torque ft. lbs. | Plated Iron Part # |
|---------|---------|----------|-------------------|-----------------|--------------------|
|         | from    | to       |                   |                 |                    |
| 3/4"    | 1-8/64" | 1-20/64" | 6                 | 21              | A9 <sup>1</sup>    |

<sup>1</sup> Global investment cast carbon steel

NOTE: Products placed in blue plastic bin with label.

## Boss® Ground Joint Couplings with Female Spud

### Application

- Leakproof seal forms when the metal head of the stem makes contact with the patented polymer seat in the spud

### Features


- Positive metal-to-polymer seal
- Easy to seal

### Specification

- Recommended for steam service up to 450°F (232°C)

| Hose Shank x NPT | Required Case Qty | Plated Iron Part # |
|------------------|-------------------|--------------------|
| 2"               | 4                 | GF81 <sup>1</sup>  |

<sup>1</sup> Not to be used with #250, #275 or #306 Boss clamps



## Boss Clamps

### ⚠ WARNING

- The bolts used in the Boss interlocking clamps are not standard bolts. They vary from standard bolts in their length, diameter, overall thread length and material hardness. These bolts can be retorqued, but it is **not** recommended that the bolts or clamps be reused, as they are designed for a single bend only. Dixon® recommends using only factory supplied replacement bolts.
- Torque values for clamps are based on dry bolts. The use of lubricant on bolts will adversely effect clamp performance. *Do not lubricate nuts and bolts.*
- For all Bolt Tightening Sequences, please visit [dixonvalve.com](http://dixonvalve.com)

### Features

- Recommended torque rating in ft. lbs.
- Replacement nuts and bolts are available, contact Dixon for more information

### Specification

- Recommended for steam service up to 450°F (232°C)

### 4 Bolt Type, 2 Gripping Fingers

| Hose ID | Hose OD  |          | Required Case Qty | Torque ft. lbs. | Zinc Plated Iron Part # |
|---------|----------|----------|-------------------|-----------------|-------------------------|
|         | from     | to       |                   |                 |                         |
| 2"      | 2-32/64" | 2-50/64" | 4                 | 60              | BU29                    |



NOTE: Products placed in blue plastic bin with label.



**Dix-Lock® Coupler**



| Body Size | Threads   | Required Case Qty | Part # |
|-----------|-----------|-------------------|--------|
| 1/2"      | 3/4" barb | 5                 | 4NS6   |



| Body Size | Threads        | Required Case Qty | Part # |
|-----------|----------------|-------------------|--------|
| 1/2"      | 3/4"-14 M-NPTF | 5                 | 4NM6   |



| Body Size | Threads        | Required Case Qty | Part # |
|-----------|----------------|-------------------|--------|
| 1/2"      | 3/4"-14 F-NPTF | 5                 | 4NF6   |

**Dix-Lock Plug**



| Body Size | Threads        | Required Case Qty | Part # |
|-----------|----------------|-------------------|--------|
| 1/2"      | 3/4"-14 F-NPTF | 5                 | N4F6   |



| Body Size | Threads   | Required Case Qty | Part #  |
|-----------|-----------|-------------------|---------|
| 1/2"      | 3/4" barb | 5                 | N4S6-LS |



| Body Size | Threads     | Required Case Qty | Part #  |
|-----------|-------------|-------------------|---------|
| 1/2"      | 3/4" M-NPTF | 5                 | N4M6-LS |

**Dual-Lock Coupler**



| Body Size | Threads   | Required Case Qty | Part # |
|-----------|-----------|-------------------|--------|
| 1/2"      | 3/4" barb | 5                 | 4PS6   |




| Body Size | Threads     | Required Case Qty | Part # |
|-----------|-------------|-------------------|--------|
| 1/2"      | 3/4" M-NPTF | 5                 | 4PM6   |



| Body Size | Threads     | Required Case Qty | Part # |
|-----------|-------------|-------------------|--------|
| 1/2"      | 3/4" F-NPTF | 5                 | 4PF6   |

**Dual-Lock Plug**



| Body Size | Threads     | Required Case Qty | Part # |
|-----------|-------------|-------------------|--------|
| 1/2"      | 3/4" M-NPTF | 5                 | P4M6   |

NOTE: Products placed in blue plastic bin with label.

## Safety Check Valves

### Applications

- Used in temporary plant/factory air lines, construction sites, shipyards or utilities
- Not for use in applications where 100% of the available air is required, i.e. sand blast, pile driving rigs, expansion joint blow down pipes, etc.

### Features

- High flow valve provides optimum performance
- Controls excess air flow (SCFM) in only one direction
- Automatically senses change in air flow and shuts off the flow in the event of a surge in excess of valve flow rating thus preventing hose whip
- Does not prevent backflow

### Materials


- Solid brass body and valve
- Stainless steel spring and roll pin

### Specifications

- Maximum operating pressure: **350 PSI**
- Maximum temperature: **250°F (121°C)**

### Approval

- Conforms to OSHA regulation 1926.302 (b) (7) requiring a safety device at the source of the air supply and at branch air lines



| NPT & Hose ID Size | Cut-off Flow Rate (SCFM at 90 PSI) | Required Case Qty | Brass Part # |
|--------------------|------------------------------------|-------------------|--------------|
| 3/4"               | 132-148                            | 4                 | SCVJ6        |
|                    | 160-180                            |                   | SCVS6        |

NOTE: Products placed in blue plastic bin with label.

## King Cable®

### Application


- When hose, couplings or clamps fail, or there is an accidental separation of the assembly, King safety cables minimize damage to equipment and injuries to operators.

### Features


- Must be installed in the extended position (no slack)
- Cable reaches across hose fittings to provide standby safety for hose
- Spring-loaded loops in the cable ends open easily to pass over the couplings for a firm grip on the hose
- No tools needed - easy to install and remove
- Cables shipped with safety restraint labels attached
- Highly resistant to rust and corrosion
- Hose-to-hose or hose-to-rigid outlet

### Materials

- Wire rope: galvanized carbon steel
- Ferrules: aluminum
- Springs: galvanized carbon steel

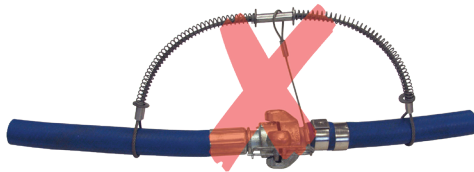

Incorrect installation

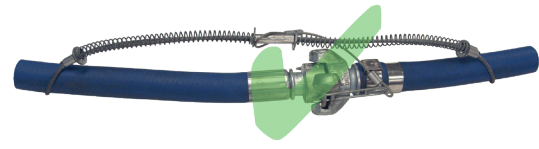

Correct installation

### Hose-to-Tool Service



Hose end

Tool end

| Hose ID       | Cable | Length  | Maximum Working Pressure (PSI) | Required Case Qty | Steel Part # |
|---------------|-------|---------|--------------------------------|-------------------|--------------|
| 1/2" - 1-1/4" | 1/8"  | 20-1/4" | 200                            | 4                 | WSR1         |

### Hose-to-Hose Service



Hose end

Hose end


| Hose ID       | Cable | Length  | Maximum Working Pressure (PSI) | Required Case Qty | Steel Part # |
|---------------|-------|---------|--------------------------------|-------------------|--------------|
| 1/2" - 1-1/4" | 1/8"  | 20-1/4" | 200                            | 4                 | WB1          |
| 1-1/2" - 3"   | 1/4"  | 38"     | 200                            |                   | WA2          |

### In-Line Lubricators

**Application**

- Protects portable or stationary air tools by efficiently oiling the tool mechanisms; each time an air tool is operated a fine mist of oil is injected into it along with the air from the compressor

**Features**

- Installation is recommended within 25' of the tool to be lubricated, refer to the arrow for proper air flow direction
- Transparent sight disc allows visual inspection of oil level
- Oil flow regulated by screwdriver screw adjustment, minimum flow rate is 30 SCFM
- Not recommended for constant flow applications
- For reciprocating tools only
- Type of oil to use: any petroleum-based, non-detergent light weight oil (SAE 10/150SSU) which will readily break up into a mist, i.e., Mobil DTE light or comparable oil, do not use any synthetic oil or oils containing additives or solvents
- See bottom of this page for air tool lubricant 



| NPT Size | Oil Capacity  | Maximum Working Pressure at ambient temperature (70°F) | Air Flow at 70 PSI | Required Case Qty | Aluminum Part # |
|----------|---------------|--|--------------------|-------------------|-----------------|
| 1/2"     | 1.4 fluid oz. | 500 PSI  | 30 SCFM            | 3                 | PL300           |

NOTE: Products placed in blue plastic bin with label.

### Air Tool Lubricants

**Application**

- High-grade lubricant prolongs the service life of air tools, cylinders, and accessories

**Features**

- #10 weight lubricant
- Prohibits rust and removes moisture as it lubricates
- Non-corrosive, non-reactive, and does not decompose
- Easy pour spout helps prevent costly spills



| Size   | Required Case Qty | Part #  |
|--------|-------------------|---------|
| 1 pint | 2                 | DATL016 |

### Anti-Freeze Lubricants

**Application**

- Winter grade air tool lubricant prevents air line, air tool and in-line lubricator freeze-up

**Feature**

- Can be poured directly into tool or used with air line lubricators

**Specification**

- Minimum temperature -45°F (-43°C)



| Size   | Required Case Qty | Part #   |
|--------|-------------------|----------|
| 1 pint | 2                 | DATL016W |

## Safety Vented Ball Valves

### Application

- For air service only

### Specification

- Pressure rating: 0-125 PSI

### Features


- Blow-out proof stem design
- Adjustable packing gland

### Approval

- Vent downstream air in accordance with OSHA regulation 1910.147 for pneumatic systems

### Materials

- Bronze valve
- Chromium plated ball
- RTFE seats and stuffing box ring



| Female NPT | Port     | Required Case Qty | Bronze Part # |
|------------|----------|-------------------|---------------|
| 3/4"       | standard | 3                 | BBV75LV       |

NOTE: Products placed in blue plastic bin with label.

## Whip Hose

| Description  | Required Case Qty | Part #       |
|--|-------------------|--------------|
| Whip hose 1/2" x 6', Air King® x 7/8" threaded bent stem | 1                 | WH50X6AKBS87 |



| Description   | Required Case Qty | Part #       |
|---|-------------------|--------------|
| Whip hose 1/2" x 6', Air King x 1/2" threaded bent stem | 1                 | WH50X6AKBS50 |



| Description                                 | Required Case Qty | Part #     |
|---|-------------------|------------|
| Whip hose 3/4" x 6', Air King x 3500 nipple | 1                 | WH75X6AK35 |



## Sign Holder

| Description         | Required Case Qty | Part #     |
|---------------------|-------------------|------------|
| End cap sign holder | 2                 | SIGNHOLDER |



## End Cap Sign

| Description              | Required Case Qty | Part #  |
|--------------------------|-------------------|---------|
| Outside air end cap sign | 1                 | OA-SIGN |



## Blue Bins with Label

| Description          | Required Case Qty | Contents                                     | Part #      |
|----------------------|-------------------|--|-------------|
| Blue bins with label | 1                 | S-12416 (2),<br>S-13536 (13),<br>S-12414 (5) | OA-BLU-BINS |



### PVC Tubing and Hose Cutters



**Features**

- Rugged construction cuts up to 3/4" tubing or hose
- Corrosion resistant hardened steel blade ensures straight, crisp cuts for optimum fit

| Part # |
|--------|
| TC97   |
| TC97RB |



**Features**

- Cuts low-pressure fabric reinforced hose up to 1" OD
- Reversible blade

| Part #                     |
|----------------------------|
| HC90                       |
| HC90RB (replacement blade) |



**Features**

- Cuts hose and tubing up to 1-7/8" OD
- Tough fiberglass reinforced handle
- Stainless steel blade

| Part #                      |
|-----------------------------|
| LHC95                       |
| LHC95RB (replacement blade) |

### American Made PTFE Tape (Purple)

**Features**

- Superior quality
- Not for use in oxygen applications

**Specifications**

- Temperature range: -450°F to 500°F (-268°C to 260°C)
- Thickness: 3.5 mil (0.0035 mm)



| Size | Length | Part #       |
|------|--------|--------------|
| 1/2" | 520"   | TTPM50-520   |
|      | 700"   | TTPM50-700   |
|      | 1429"  | TTPM50-1429  |
| 3/4" | 520"   | TTPM75-520   |
|      | 700"   | TTPM75-700   |
|      | 1429"  | TTPM75-1429  |
| 1"   | 520"   | TTPM100-520  |
|      | 700"   | TTPM100-700  |
|      | 1429"  | TTPM100-1429 |

**Industrial PTFE Tape (White)**


**Feature**

- Not for use in oxygen applications

**Specifications**

- Thickness: 3.5 mil (0.0035 mm)
- Temperature range: -212°F to 500°F (-136°C to 260°C)

| Size | Length | Part # | Optional Qty |
|------|--------|--------|--------------|
| 1/2" | 260"   | TTA50  | 550          |
|      | 520"   | TTB50  | 500          |
|      | 1296"  | TTC50  | 250          |
| 3/4" | 260"   | TTA75  | 350          |
|      | 520"   | TTB75  | 350          |
| 1"   | 520"   | TTB100 | 250          |



**Stainless Steel PTFE Tape (Gray)**

**Application**

- Useful on stainless steel threaded joints or connections

**Features**

- Not for use in oxygen applications
- PTFE with nickel added, nickel acts like a ball bearing
- Made in the U.S.

**Specifications**

- Thickness: 4 mil
- Temperature range: -450°F to 550°F (-268°C to 288°C)

| Size | Length | Part #  | Optional Qty |
|------|--------|---------|--------------|
| 1/2" | 260"   | TTA50SS | 10           |



**Industrial Heavy Duty PTFE Tape (Pink)**

**Feature**

- Not for use in oxygen applications

**Specifications**

- Thickness: 4 mil
- Temperature range: -400°F to 500°F (-240°C to 260°C)

| Size | Length | Part # | Optional Qty |
|------|--------|--------|--------------|
| 1/2" | 540"   | TTBP50 | 500          |



**PTFE Tape for LP Gas (Yellow)**

**Features**

- Not for use in oxygen applications
- Underwriters Listed

**Specifications**

- Thickness: 4 mil
- Maximum temperature: 500°F (260°C)

| Size | Length | Part #  | Optional Qty |
|------|--------|---------|--------------|
| 1/2" | 260"   | TTA50LP | 500          |



## Thread Sealant Paste



### Application

- Do not use with oxygen

### Specification

- Temperature range: -300°F to 500°F (-184°C to 260°C)

| Size     | Part # | Optional Qty |
|----------|--------|--------------|
| 1/4 pint | LCTS14 | 24           |
| 1/2 pint | LCTS1  | 24           |
| 1 pint   | LCTS2  | 12           |
| 1 quart  | LCTS3  | 12           |

## Joint Sealant Gasket Material

### Features

- GORE-TEX interchangeable
- Form-In-Place expanded PTFE gasket material with adhesive backing
- Manufactured from 100% virgin PTFE
- Unaffected by all common chemicals (pH from 0-14)
- Unlimited shelf life
- Resilient with low cold flow
- Requires less force than standard gasket materials
- Made in the USA
- Larger spools are available, consult Dixon® for price and availability



### Specifications

- Pressure range: **vacuum to 3000 PSI**
- Temperature range: -450°F to 600°F (-268°C to 316°C)

### Approval

- FDA compliant #21CFR177.1550

| Size | Length | Part #    |
|------|--------|-----------|
| 1/4" | 20'    | LCJS4-20  |
| 1/4" | 50'    | LCJS4-50  |
| 3/8" | 25'    | LCJS6-25  |
| 1/2" | 15'    | LCJS8-15  |
| 3/4" | 15'    | LCJS12-15 |

## Leak Detector

### Application

- Detects leaks by forming bubbles which remain for up to ten minutes

### Features

- Will not cause corrosion or deterioration
- Color: fluorescent yellow
- Non-toxic, non-freezing

### Specification

- Temperature range: -7°F to 180°F (-20°C to 82°C)

### Approval

- Meets Federal specification MIL-L-25567-C



| Size  | Part # | Case Qty |
|-------|--------|----------|
| 8 oz. | LCLD   | 24       |

### Dixon® Coupling Lubricant

**Application**

- For use in assembly operations involving natural or synthetic rubber or plastic, also an excellent lubricant when rubber or plastic needs to be cut, machined, pressed, turned, trimmed or ground

**Features**

- Biodegradable lubricant for coupling shanks, O-rings, hoses, sleeves, rubber washers and grommets
- Once coupling lubricant dries, slipping action goes away



| Size     | Part # |
|----------|--------|
| 1 liter  | DCL20  |
| 4 liters | DCL80  |

### WD-40 Smart Straw

**Features**

- Permanently attached straw
- Flip up for a precision spray; flip down for regular spray action
- Sold in case quantities only
- Should not be used as a lubricant for coupling shanks



| Size   | Part # | Case Qty |
|--------|--------|----------|
| 11 oz. | WD40   | 12       |



### Rapp-it Pipe Repair Kit Display

**Features**

- Rapp-It pipe repair kit not included
- Displays up to six Rapp-It repair kits
- Display box must be assembled by customer

| Size                         | Description   | Part #         |
|------------------------------|---|----------------|
| 9-1/2" L x 11-1/2" W x 16" H | Display includes box, 30 full-color repair kit product flyer's, and one pipe sample; Repair kit product is not included, see display fill | RAPDISPLAY     |
| ---                          | Display fill includes 2 repair kits of each size (10 kits total); display not included  | RAPDISPLAYFILL |



### Clamp Rack

**Size**

- Rack with clamps contains 9 clamp sizes with diameter ranges from 7/32" to 2-3/4"


**Features**

- Sign identifies each clamp size and diameter range
- Clamps included are: 30 of part# MH4, 30 of part# MH6, 20 of part# HS10, 20 of part# HS12, 20 of part# HS20, 20 of part# HS24, 20 of part# HS28, 20 of part# HS32, 20 of part# HS36

**Material**

- Top load metal rack made of nickel plated steel rods with enameled steel sign

| Description     | Required Case Qty | Part # |
|-----------------|-------------------|--------|
| With 200 clamps | 1                 | CRWC   |





### Shelving



| Part #       | Required Piece Qty | Description           |
|--------------|--------------------|-----------------------|
| RETAILENDCAP | 1                  | End cap with shelving |

### End Cap Display



| Part #      | Required Piece Qty | Description |
|-------------|--------------------|-------------|
| ENDCAPSNGSD | 1                  | End cap     |

### End Cap Shelving



| Part #        | Required Piece Qty | Description      |
|---------------|--------------------|------------------|
| ENDCAPSHELVES | 2                  | End cap shelving |

### Sign Holder



| Description         | Required Case Qty | Part #     |
|---------------------|-------------------|------------|
| End cap sign holder | 2                 | SIGNHOLDER |



## Limited Warranty

DIXON VALVE & COUPLING COMPANY, LLC (herein called "Dixon") warrants the products described herein and manufactured by Dixon to be free from defects in material and workmanship for a period of one (1) year from date of shipment by Dixon under normal use and service. Its sole obligation under this warranty being limited to repairing or replacing, as hereinafter provided, at its option any product found to Dixon's satisfaction to be defective upon examination by it, provided that such product shall be returned for inspection to Dixon's factory within three (3) months after discovery of the defect. The repair or replacement of defective products will be made without charge for parts or labor. This warranty shall not apply to: (a) parts or products not manufactured by Dixon, the warranty of such items being limited to the actual warranty extended to Dixon by its supplier; (b) any product that has been subject to abuse, negligence, accident, or misapplication; (c) any product altered or repaired by others than Dixon; and (d) normal maintenance services and the replacement of service items (such as washers, gaskets, and lubricants) made in connection with such services. To the extent permitted by law, this limited warranty shall extend only to the buyer and any other person reasonably expected to use or consume the goods who is injured in person by any breach of the warranty. No action may be brought against Dixon for an alleged breach of warranty unless such action is instituted within one (1) year from the date the cause of action accrues. This limited warranty shall be construed and enforced to the fullest extent allowable by applicable law.

Other than the obligation of Dixon set forth herein, Dixon disclaims all warranties, express or implied, including but not limited to any implied warranties of merchantability or fitness for a particular purpose, and any other obligation or liability. The foregoing constitutes Dixon's sole obligation with respect to damages, whether direct, incidental, or consequential, resulting from the use or performance of the product.

Some products and sizes may be discontinued when stock is depleted or may require a minimum quantity for ordering.

## Limits of Liability

This brochure is intended as a product offering. It is not intended to be a user or technical manual. Information in this brochure is subject to change without notice. All users and distributors of products sold through this brochure should contact Dixon with questions of use, compatibilities, coupling procedures, and life of product. Our full-time engineering and test staff are always available to recommend uses and to assist distributors and users with any questions.



### Safety



Safety logos, which appear throughout our catalog, are used as a reminder that the user should carefully review for the appropriateness of the product for the media, application, and environment in which it will be used.

NOTE: Because of the health hazards associated with contamination and lead content in drinking water systems, Dixon couplings, unless otherwise specifically approved, are not recommended for potable water service and should not be used in applications where drinking water will contact the wetted surfaces of the coupling.

All Dixon products are shipped in cartons with the following warning:

**"WARNING:** This product contains lead, a chemical known to the State of California to cause cancer and birth defects or other reproductive harm."

## Trademark

Delrin® and Zytel® are registered trademarks of E.I. duPont Nemours and Company.

Kalrez® is a registered trademark of DuPont Dow Elastomers.

All other trademarks appearing in the Dixon illustrated product list are the property of their respective owners.

## Copyright

Copyright © 2024 by Dixon Valve & Coupling Company, LLC

All rights reserved. This book is copyrighted material. Use, reproduction or copying of it by anyone other than Dixon® is strictly forbidden without its express written consent.

NOTE: Reasonable care has been taken in preparing this catalog. Dixon Valve & Coupling Company, LLC reserves the right to make corrections.

